



**Part No:** 900115MIX-W

**Description:** Balanced flow laboratory monobloc mixer tap, aerated nozzle.

**Applications:** Standard laboratory mixer hot and cold water tap.

**Options:** Removable nozzles are available on request.

**Construction:** All brass body, Rilsan plastic coated, light white (RAL9016).

ABS grey rotating handwheels, Identification coding to DIN13792

**Connection and mounting:** 2 x 3/8" BSP female flat ended flexible braided SS hoses, 330mm long.

**Pressure and Flow:** Maximum pressure 100PSI (Recommended 20PSI)

**Mounting Hole:** 30mm diameter.

**Flow Rate @ 20 psi = 35 Litre/min.**

**Spares:** Spare handwheel assembly: Pt No 960180

Valve headworks, Pt Nos 950148

**WRAS:** Approved materials.

# flowstar

**Industrial Valve Specialist**




+44 (0)1482 601030



+44 (0)7708 461097



sales@flowstar.co.uk

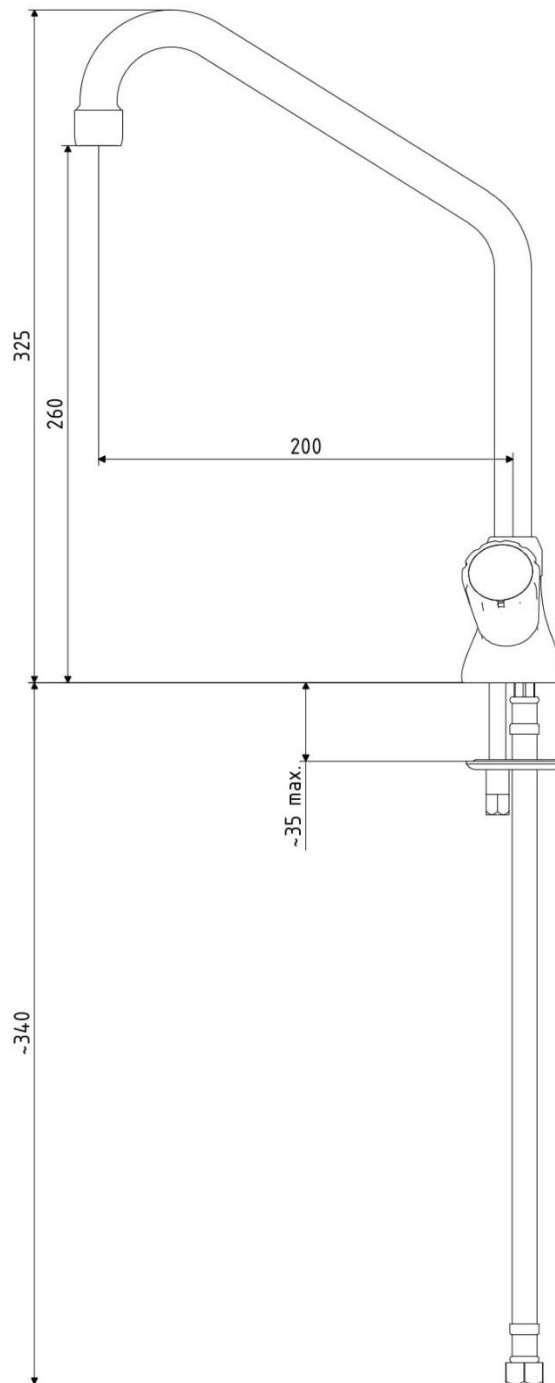

LRQA  
CERTIFIED  
ISO 9001

WE SPECIALISE IN SAFETY VALVES, REDUCING VALVES, SUSTAINING VALVES, INDUSTRIAL VALVES, ANCILLARY VALVES & VALVE REPAIRS

**WWW.FLOWSTARVALVESHOP.COM**

**fs**